


◆ DIMENSIONS

(mm)

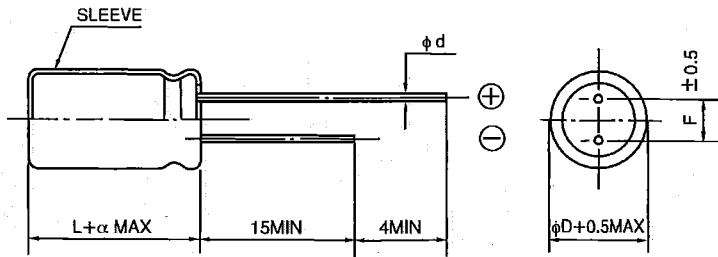

ϕD	8	10
ϕd	0.6	
F	3.5	5.0
α	$L \leq 16 : \alpha = 1.5$ $L \geq 20 : \alpha = 2.0$	

◆ STANDARD SIZE

Rated voltage 6.3V(0J)			
Rated capacitance (μF)	Size $\phi D \times L$ (mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	ESR (m Ω MAX/20°C, 100kHz)
820	8 x 11.5	1340	21
1200	8 x 16	1850	18
1800	8 x 20	2350	12
1500	10 x 12.5	1960	16
1800	10 x 16	2460	12.5
2200	10 x 20	2770	11
3300	10 x 25	3230	9

Rated voltage 10V(1A)			
Rated capacitance (μF)	Size $\phi D \times L$ (mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	ESR (m Ω MAX/20°C, 100kHz)
680	8 x 11.5	1340	21
1000	8 x 16	1850	18
1500	8 x 20	2350	12
1000	10 x 12.5	1960	16
1500	10 x 16	2460	12.5
1800	10 x 20	2770	11
2200	10 x 25	3230	9

Rated voltage 16V(1C)			
Rated capacitance (μF)	Size $\phi D \times L$ (mm)	Rated ripple current (mA r.m.s./105°C, 100kHz)	ESR (m Ω MAX/20°C, 100kHz)
470	8 x 11.5	1340	21
680	8 x 16	1850	18
1000	8 x 20	2350	12
680	10 x 12.5	1960	16
1000	10 x 16	2460	12.5
1500	10 x 20	2770	11
1800	10 x 25	3230	9